



January 2007

Horticulture/Fruit/2007-01pr

CALIBRATING YOUR ORCHARD SPRAYER

Brent Black, USU Extension Fruit Specialist
Earl Seeley, Private Orchard Consultant

The costs of fungicides, miticides, insecticides, foliar nutrients, wetting agents and plant growth regulators continue to increase. For a full spray program on apples, for example, the cost of spray materials alone could potentially exceed \$700 per acre per year. A poorly calibrated sprayer applying an average of 10% more material than intended, directly increases production costs by \$70 per acre. Nozzles on sprayers wear out over time, and flow rates increase as nozzles wear, with worn nozzles eventually increasing flow rates by 10% or more. Financially sound management requires carefully calibrating orchard sprayers to optimize the benefits from applying expensive spray materials.

Further, materials such as plant growth regulators used for fruit thinning, fruit loosening, or stop drop have a narrow acceptable dose range. When growth regulators are applied at too low of a dose the plant response is inadequate. Alternatively, an overdose can result in harmful side effects that can affect not only the current season's crop but also the long-term health of the orchard. Wise management of orchard health also requires keeping spray equipment properly maintained and calibrated.

Calculations for proper spray calibration are not difficult, but can be confusing, with multiple opportunities for error. To minimize confusion and reduce the risk of error, an interactive computer spreadsheet has been developed to aid in sprayer calibration.

Users will need to input information specific to their orchard and equipment. User inputs are:

1. Ground speed (miles per hour)
2. Spacing between rows (feet)
3. Desired spray volume (gallons per acre)
4. Spray distribution pattern (fraction of the total spray to be discharged at each nozzle)

The spray distribution pattern is based on the type of sprayer to be used (round plenum vs. tower type), tree size, and the desired distribution of spray between the fruiting surfaces of the upper canopy, and the "heavy wood" and dense foliage areas in the lower canopy. Figure 1 illustrates examples of how this spray distribution pattern might be configured by varying the relative amount of spray through each spray nozzle in a round plenum and tower type sprayer.

User inputs are designated in the spreadsheet by red text. The spreadsheet then calculates the target discharge rate for each nozzle (Table 1). Based on this calculated discharge rate, the spreadsheet specifies the core and disc required for the commonly-used TeeJet® hollow core spray nozzles that would give the desired flow rate at operating pressures of 100 or 150 psi.

Once the nozzles have been installed, the sprayer should be "static tested" according to the following instructions.

Static testing procedure
1. Fill the sprayer with water.
2. Park the sprayer on a level spot where the water sprayed will not cause any problems.
3. Bring the sprayer up to spraying rpm.
4. Open the nozzles and spray water for 10 minutes.
5. Measure total amount of water sprayed in the 10 minute period.
6. Divide the total gallons of water sprayed by 10 to determine actual the gallons per minute.
7. If the figure is close, but not correct, increase or decrease line pressure to raise or lower flow rate to the appropriate level.
8. After adjusting the pressure, repeat steps 1-6.


The spreadsheet can be accessed as a web program through the USU Horticulture Web site at www.hort.usu.edu/html/fruits/treeFruit.htm. Under the title "Commercial Grower Resources," click on the link titled "Sprayer Calibration." Please note that web access requires Internet Explorer version 5.5 or higher. If you would like to have the spreadsheet in Microsoft Excel format, the file can be downloaded from the USU IPM website utahpests.usu.edu/ipm/htm/resources/pesticides. Click on the link "Sprayer Calibration for Utah Orchardists" under the Tools heading.

The spreadsheet allows for up to 12 nozzles per side. Nozzles not in use for that specific spray are turned off.

Table 1. An example of the spreadsheet interface. Values in red are the user inputs for designating target spray for the specific situation. Inputs are: ground speed, row spacing, gallons per acre, and the relative amount of spray to be discharged at each nozzle. The spreadsheet then calculates gallons per minute per nozzle, and selects a nozzle size based on commonly-used commercial nozzles.

Ground speed	2.1 mph	Feet per minute =	184.8
Row spacing	12 feet	Row feet per acre =	3630
Gallons per acre	100	Minutes per acre =	19.6
		Gallons per minute =	5.09
		GPM one side =	2.55
Spray Nozzle Arrangement			
	Nozzle #	Fraction each nozzle	GPM per nozzle
Top	12	0.16	0.407
	11	0	0.000
	10	0.16	0.407
	9	0	0.000
	8	0.12	0.305
	7	0	0.000
	6	0.14	0.356
	5	0	0.000
	4	0.18	0.458
	3	0	0.000
Bottom	2	0.24	0.611
	1	0	0.000
	Total	Total	
	1.00	2.55	
Nozzle configuration for TeeJet®/Spray Systems nozzles			
		100 psi	150 psi
		D4/DC25	D3/DC25
		off	off
		D4/DC25	D3/DC25
		off	off
		D3/DC25	D2/DC25
		off	off
		D3/DC25	D3/DC25
		off	off
		D4/DC25	D3/DC45
		off	off
		D4/DC25	D4/DC25
		off	off

Figure 1. Illustration of a 6 nozzle arrangement of round plenum and tower sprayers positioned in a 16-foot row spacing with trees that are 10 feet wide, trunk of approximately 2 feet and canopy extending up to 14 feet.

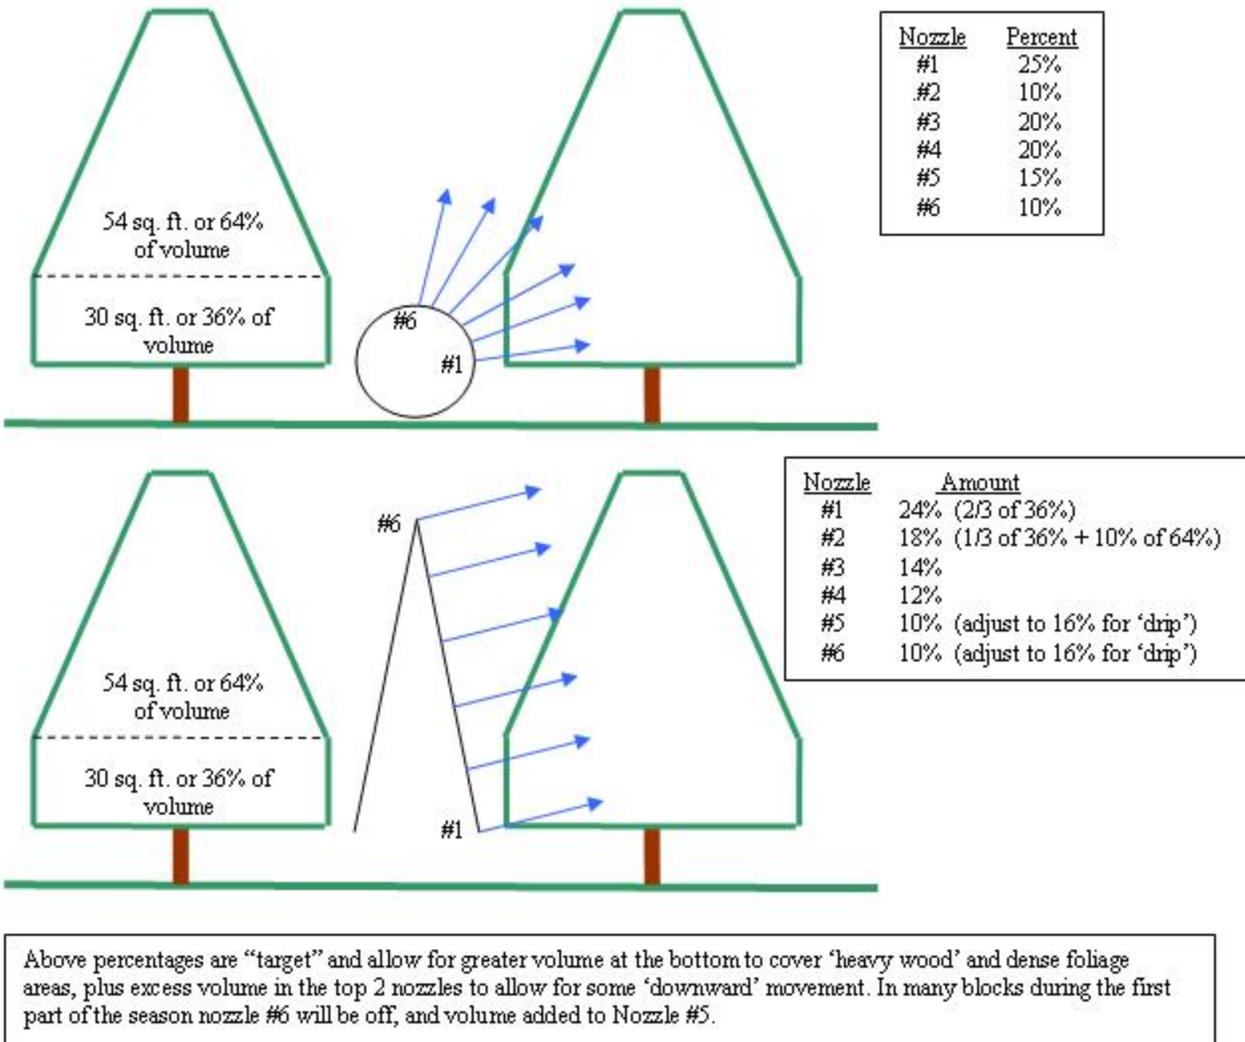

The spreadsheet was developed by USU Extension to assist in sprayer calibration. The information provided does not constitute an endorsement of any product by the authors or USU Extension.

Utah State University is committed to providing an environment free from harassment and other forms of illegal discrimination based on race, color, religion, sex, national origin, age (40 and older), disability, and veteran's status. USU's policy also prohibits discrimination on the basis of sexual orientation in employment and academic related practices and decisions.

Utah State University employees and students cannot, because of race, color, religion, sex, national origin, age, disability, or veteran's status, refuse to hire; discharge; promote; demote; terminate; discriminate in compensation; or discriminate regarding terms, privileges, or conditions of employment, against any person otherwise qualified. Employees and students also cannot discriminate in the classroom, residence halls, or in on/off campus, USU-sponsored events and activities.

This publication is issued in furtherance of Cooperative Extension work, acts of May 8 and June 30, 1914, in cooperation with the U.S. Department of Agriculture, Noelle Cockett, Vice President for Extension and Agriculture, Utah State University.