

Article Title - Analysis of environmental effects on leaf temperature under sunlight, High Pressure Sodium and Light Emitting Diodes

Jacob A Nelson¹, Bruce Bugbee^{*1}

1 Crop Physiology Laboratory, Department of Plant Soils and Climate, Utah State University, Logan, Utah, United States of America

* E-mail: bruce.bugbee@usu.edu

Abstract

The use of LED technology is commonly assumed to result in significantly cooler leaf temperatures than high pressure sodium technology. To evaluate the magnitude of this effect, we measured radiation incident to and absorbed by a leaf under four radiation sources: clear sky sunlight in the field, sunlight in a glass greenhouse, and indoor plants under either high pressure sodium or light emitting diodes. We then applied a common mechanistic energy-balance model to compare leaf to air temperature difference among the radiation sources and environments. At equal photosynthetic photon flux, our results indicate that the effect of plant water status and leaf evaporative cooling is much larger than the effect of radiation source. If plants are not water stressed, leaves in all four radiation sources were typically within 2°C of air temperature. Under clear sky conditions, cool sky temperatures mean that leaves in the field are always cooler than greenhouse or indoor plants-when photosynthetic photon flux, stomatal conductance, wind speed, vapor pressure deficit, and leaf size are equivalent. As water stress increases and cooling via transpiration decreases, leaf temperatures can increase well above air temperature. In a near-worst case scenario of water stress and low wind, our model indicates that leaves would increase 6°, 8°, 10°, and 12°C above air temperature under field, LED, greenhouse, and HPS scenarios, respectively. Because LED fixtures emit much of their heat through convection rather than radiative cooling, they result in slightly cooler leaf temperatures than leaves in greenhouses and under HPS fixtures, but the effect of LED technology on leaf temperature is smaller than is often assumed.

Introduction

The energy balance of leaves has long been studied in field conditions and a well-developed family of models is used to determine transpiration and leaf temperature over a wide range of environmental conditions, including controlled environments [1–4]. These models are well developed, and are used to predict values that are hard to measure directly, such as leaf temperature and evapotranspiration [5]. Models also provide the opportunity to compare individual parameters while keeping all other environmental conditions exactly the same. This facilitates comparison of radiation sources.

Although linearization of energy balance models, such as the Penman-Monteith equation, has been widely used, modern computing allows for more precise numerical solutions of leaf temperature. Widmoser [6] discusses the advantages of using numerical solutions.

A recent analysis showed that the conversion efficiency of electricity to photosynthetic photons of the most efficient commercial scale LED fixtures was equal to the most efficient HPS fixtures at $1.7 \mu\text{mol}$ photosynthetic photos per joule of electrical input [7]. They thus generate the same amount of thermal energy per photosynthetic photon. LED fixtures, however, dissipate much of their heat away from the plane they illuminate, while HPS fixtures dissipate more heat toward the plane they illuminate.

Elevated temperature reduces the lifespan of LEDs, so they are thermally-bonded to heat sinks where the thermal energy is removed by natural or fan-assisted convection and directed away from the plants they illuminate.

Conversely, HPS lamps operate at higher temperatures and thus generate more longwave radiation in the same direction as the photosynthetic radiation. This thermal radiation can be reduced using a barrier such as glass, but this reduces the photosynthetic radiation by about 10% (Fig. S1) and thus lowers the efficiency of the fixture.

The difference in how LED and HPS technologies dissipate thermal energy indicates that use of HPS fixtures will result in higher leaf temperatures. It is easy to misjudge the magnitude of this effect because HPS lamps are a far more concentrated light source than LEDs. Comparisons need to be made on the basis of equal photosynthetic photon flux (PPF).

Compared to sunlight and HPS lamps, LED fixtures emit almost no near infrared radiation (NIR; 700-3000 nm), but this radiation is not well absorbed by plant leaves. Photosynthetic (400 to 700 nm) and longwave (3,000 to 100,000 nm) radiation are about 95% absorbed, but non-photosynthetic solar NIR is only about 20% absorbed, and has a smaller effect on leaf heating. Unabsorbed radiation is either transmitted or reflected.

Our objective was to use a well-established energy-balance model to compare the leaf-to-air temperature difference in four radiation scenarios across multiple environments.

Materials and Methods

Radiation sources

We measured the radiation from four sources: clear sky sun in the field, clear sky sun in a greenhouse, and either HPS or LED fixtures in indoor environments (devoid of sunlight). The most efficient commercially-available HPS and LED fixtures ($1.7 \mu\text{mol}/J$; [7]) were used. The HPS fixture included a double-ended, 1000 W lamp (MASTER GreenPower, Philips Lighting, The Netherlands) in an efficient (less than 10% losses) luminaire (ePapillon, Lights Interaction, The Netherlands). The LED fixture was a 400 W, Red-Blue, passively cooled fixture (VividGro, Lighting Science Group, FL, USA). Clear sky sun measurements were made near solar noon on a clear summer day in Logan, UT, USA. Greenhouse sun measurements were made under clear sky conditions in a typical glass greenhouse.

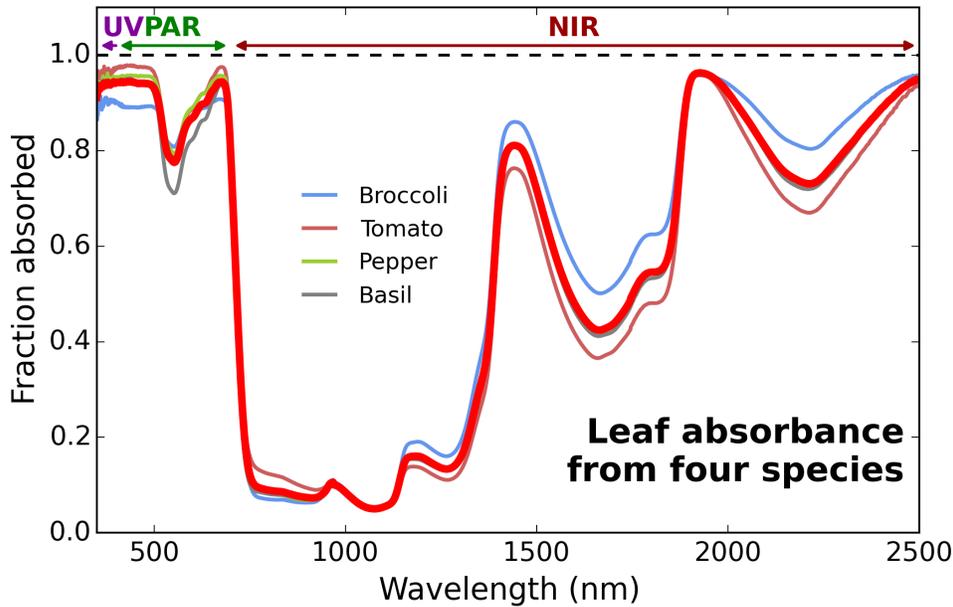


Figure 1. Average absorption (red line) of leaves from tomato, pepper, basil and broccoli. Variation among species is due to differences in leaf reflectance. The broccoli leaf had slightly higher reflectance of PAR than the other species. All plants were grown in a greenhouse.

Absorption of shortwave radiation

We measured shortwave absorption as the fraction of light that is neither transmitted nor reflected by a leaf.

Leaf absorption was determined by measurement of reflection and transmission between 350-2500 nm using a spectroradiometer (FieldSpec Pro, ASD Inc., Boulder, CO, USA) and a halogen light source. Transmission was measured through a single leaf at 90° from the leaf surface. Reflectance was made over a large black cavity with a small hole to mimic a black body, again at 90° from the leaf surface. Absorption was averaged among four species: tomato (*S. lycopersicum*), pepper (*C. annuum*), basil (*O. basilicum*), and broccoli (*B. oleracea*) (Fig. 1) to incorporate a range of leaf types. Three separate leaves were measured on for each species. Average absorption was nearly identical to previously published values from multiple species and a variety of environments [8, 9].

Relative spectral radiance of each radiation source was measured using the same spectroradiometer as above (Fig. 2). Incoming shortwave (350-2,500 nm) and longwave (>3,000 nm) radiation measurements for each radiation scenario were made using a net radiometer (CNR1, Kipp & Zonen, the Netherlands). Photosynthetic photon flux (PPF; in moles per m² per s) measurements were made using a recently calibrated quantum sensor (LI-190, LI-COR, Lincoln, NE, USA), and converted to photosynthetically active radiation (PAR; in watts per m²) using spectral data for each light source and Planck's equation ($E = hc/\lambda$). The absorbed radiation was normalized to equal incident PPF for each radiation source.

Because, UV and photosynthetic radiation have much higher absorption than NIR, shortwave radiation was divided into three bands: ultraviolet (UV, 350-400 nm), PAR (400-700 nm), and near-infrared (NIR, 700-2500 nm). UV radiation below 350 nm is a minimal component from all radiation sources, and was not included in the analysis.

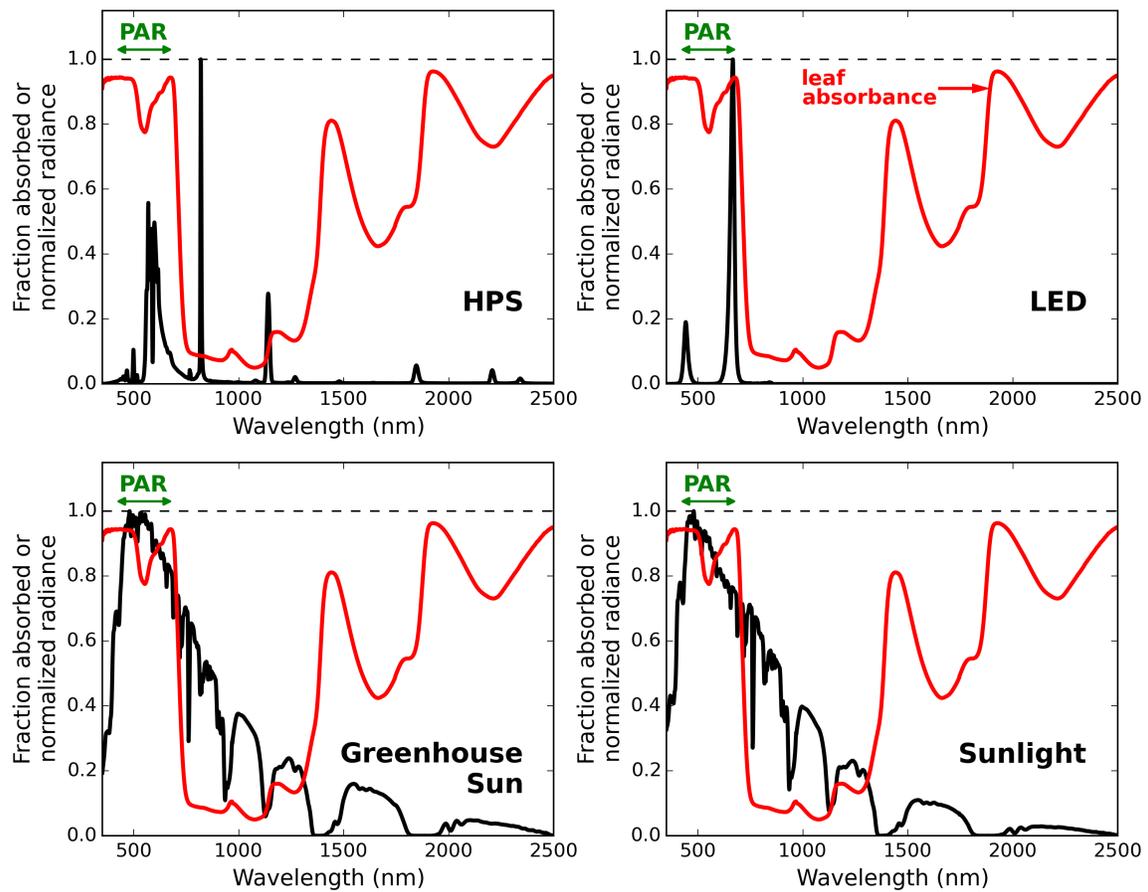


Figure 2. Radiance spectrum from four radiation sources (black line) and average leaf absorbance (red line). Electric lights (HPS and LED) output most of their radiation in the photosynthetic regions. Sunlight has significant NIR radiation, but this is poorly absorbed by leaves.

Incoming and outgoing longwave radiation

97

Longwave radiation was separated into three components: sky longwave, source longwave, and emitted longwave. Sky longwave is the radiation emitted from either a clear sky (typically 300 W/m^2 or about -1°C), or the ceiling of the controlled environment (assumed to be 452 W/m^2 or about 28°C for all indoor cases). Source longwave is defined as the incoming longwave radiation from either the LED or HPS fixture, and was measured using a black body pyranometer (part of the net radiometer above). Incoming longwave radiation with the fixture present was subtracted from incoming longwave with the fixture absent. Source longwave was scaled with PPF. Emitted longwave is calculated using the Stefan-Boltzman law as outlined below. We assume the leaf is the same temperature as the surfaces below the leaf and thus there is no net longwave transfer.

98
99
100
101
102
103
104
105
106
107
108

Energy balance model

109

We modeled a single top leaf because the uppermost leaves absorb about 75% of the incident radiation and have the greatest temperature differences.

110
111

Leaf temperature was calculated using the energy balance model that has been described, in detail, in both Campbell and Norman [10] and Monteith and Unsworth [11],

112
113
114

$$R_{abs} = R_{emit} + C + \lambda E \quad (1)$$

where,

115

$$\begin{aligned} R_{abs} &= \text{Absorbed radiation in } \text{W/m}^2 \\ R_{emit} &= \text{Emitted radiation via Stefan-Boltzmann law in } \text{W/m}^2 \\ C &= \text{Transfer of sensible heat via convection in } \text{W/m}^2 \\ \lambda E &= \text{Latent heat transfer in } \text{W/m}^2 \end{aligned}$$

Assuming the system is at steady state, the absorbed radiation (R_{abs}) must equal the sum of the emitted radiation (R_{emit}), sensible (C) and latent (λE) heat transfer. Absorbed radiation was measured as described in the previous subsections. Emitted radiation is defined by the Stefan-Boltzmann law,

116
117
118
119

$$R_{emit} = \varepsilon_s \sigma T_L^4 \quad (2)$$

where,

120

$$\begin{aligned} \varepsilon_s &= \text{Emissivity of the leaf (assumed to be 0.97)} \\ \sigma &= \text{The Stefan-Boltzmann constant or } 5.67 * 10^{-8} \text{ W/m}^2 \text{K}^4 \\ T_L^4 &= \text{Leaf temperature in Kelvin to the fourth power} \end{aligned}$$

The transfer of sensible heat (C), through convection, is defined as a function of the difference in leaf to air temperature and the boundary layer conductance such that, 121
122

$$C = c_p g_{Ha} (T_L - T_a) \quad (3)$$

where, 123

- c_p = Specific heat of air at a constant pressure or $29.3 \text{ J/mol } ^\circ\text{C}$
- T_L = Leaf temperature in Celsius
- T_a = Air temperature in Celsius

Boundary layer conductance (g_{Ha} in $\text{mol/m}^2\text{s}$) is a semi-empirical function defined as, 124

$$g_{Ha} = 1.4 * 0.135 \sqrt{\frac{u}{d}} \quad (4)$$

where, 125

- 1.4 = An empirical constant accounting for turbulence
- 0.135 = An constant determined by the viscosity, density, and diffusivity of air
- u = Wind speed in m/s
- d = Characteristic dimension in meters or 0.72 times the maximum leaf width

Latent heat transfer (λE) is defined as a function of the vapor pressure deficit ($\frac{e_s(T_L) - e_a}{p_a}$) and the vapor conductance (g_v in $\text{mol/m}^2\text{s}$) such that, 126
127

$$\lambda E = \lambda g_v \frac{e_s(T_L) - e_a}{p_a} \quad (5)$$

where, 128

- λ = Latent heat of evaporation or 44 kJ/mol
- $e_s(T_L)$ = Saturation vapor pressure of water at leaf temperature in kPa
- e_a = Partial pressure of water vapor in air in kPa
- p_a = Atmospheric pressure or 101.3 kPa

Vapor conductance (g_v) is a combination of both the vapor boundary (g_{va}) and stomatal (g_{vs}) conductances (both in c) such that, 129
130

$$g_v = \frac{g_{vs} g_{va}}{g_{vs} + g_{va}} \quad (6)$$

Stomatal conductance (g_{vs}) typically varies between $0.1 \text{ mol/m}^2\text{s}$ for drought stressed plants and $0.5 \text{ mol/m}^2\text{s}$ for high transpiring plants. Vapor boundary conductance is defined similarly to equation 4 with slightly different constants,

$$g_{va} = 1.4 * 0.147 \sqrt{\frac{u}{d}} \quad (7)$$

These components account for all significant energy paths. Other energy sources and sinks include photosynthesis and respiration, which are negligible in these conditions. Combining equations 1, 2, 3, and 5 gives a comprehensive overview of the model,

$$R_{abs} = \varepsilon_s \sigma T_L^4 + c_p g_{Ha} (T_L - T_a) + \lambda g_v \frac{e_s(T_L) - e_a}{p_a} \quad (8)$$

The equation was solved for leaf temperature (T_{leaf}) using an iterative approximation. Results are presented as the difference between leaf and air temperature ($T_{leaf} - T_{air}$), as leaf temperature is only relevant in the context of it's environment.

Some of the energy absorbed by leaves is used to fix CO_2 into sucrose in the process of photosynthesis. The photosynthetic energy use in field conditions is typically less than 4% of the total absorbed energy and has thus been ignored in energy balance models. However, assuming optimal water and nitrogen, a moderate PPF and physiologically optimum CO_2 enrichment, it is possible to increase the quantum yield of photosynthesis to 0.08 moles of CO_2 fixed per mole of photons absorbed. Assuming respiration is 30% of photosynthesis, net metabolism can use about 8% of the absorbed shortwave energy [5]. This is still a small contribution to the total energy balance, and it would be similar for all radiation sources.

Code for the execution of the model can be found in supplemental information (File S2).

Sensitivity analysis


Excluding the radiation inputs, equation 8 is ultimately a function of seven environmental variables: air temperature, relative humidity/vapor pressure deficit, wind speed, leaf size, sky temperature, stomatal conductance, and atmospheric pressure. Default values for each parameter were chosen to reflect typical growing conditions (as shown in figure captions).

Air temperature was held at 25°C , which is a common set point for greenhouses and growth chambers. Convective heat transfer from the lighting fixture and surrounding air is assumed to be controlled via the temperature control system before it would impact leaf temperature. When other environmental conditions are constant, air temperature between 15° and 35°C has a minimal effect on leaf to air difference (Fig. 3).

Environmental parameters were varied across a biologically significant range.

Results and discussion

The greatest variation among sources in incident radiation was in the near-infrared (NIR) and longwave bands (Table 1). NIR is poorly absorbed by leaves, so absorbed NIR was less than 30% of absorbed PAR energy for all sources.

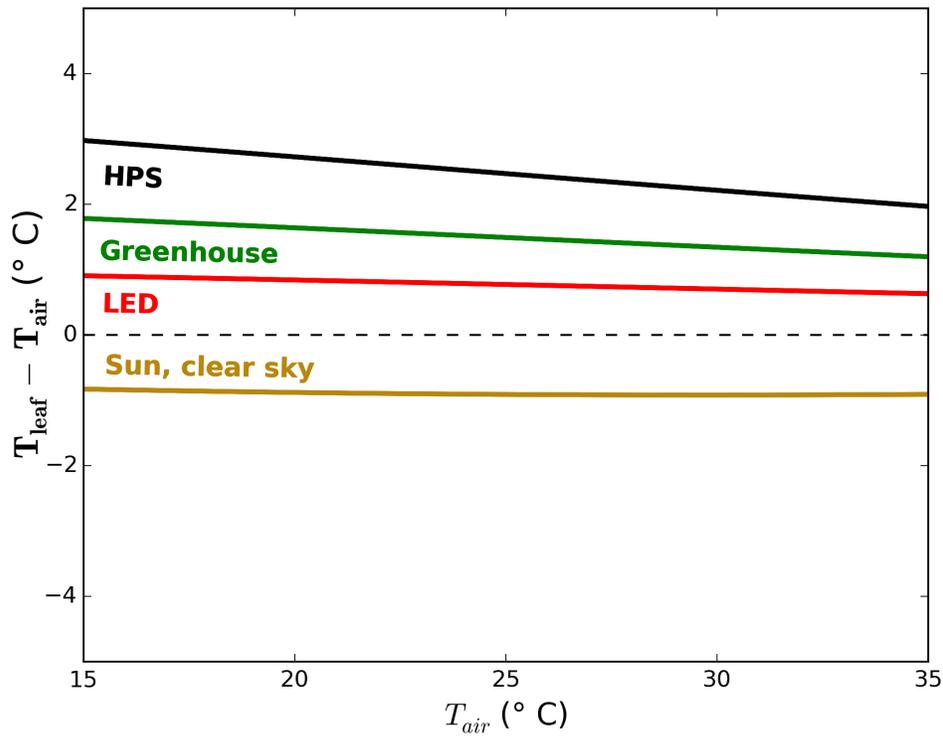

Environmental parameters:
 Stomatal conductance = $0.4 \text{ moles/m}^2 \text{ s}$
 Wind speed = 1.0 m/s
 Leaf width = 5 cm
 Vapor pressure deficit = 1.6 kPa
 Photosynthetic photon flux (PPF) = $1000 \text{ } \mu\text{moles/m}^2 \text{ s}$

Figure 3. Leaf temperature response to air temperature. Vapor pressure deficit was held constant.

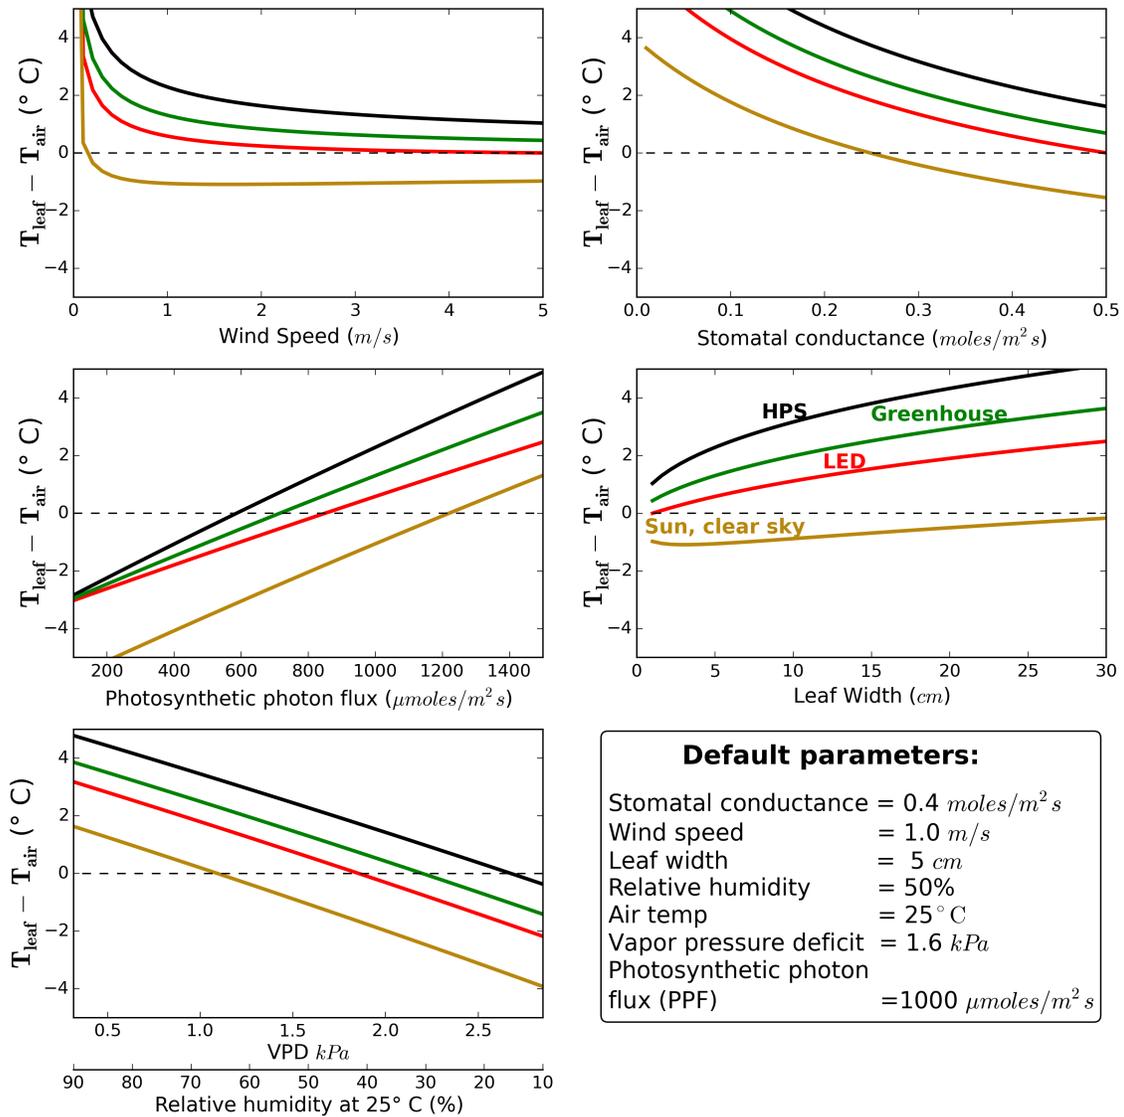


Figure 4. Calculated effects of environmental conditions on the difference between leaf temperature and air temperature under four radiation scenarios.

Table 1. Incident radiation, fraction absorbed, and total absorbed radiation for each source. The absorbed radiation was normalized to a PPF of 1000 $\mu\text{moles per m}^2$ per s for each radiation source. This does not result in exactly equal PAR (in watts per m^2) because of spectral differences among radiation sources. The total absorbed radiation for each source is shown in bold. Leaf temperature was held constant at 25°C. Net longwave exchange with lower leaves or surfaces was assumed to be zero.

	UV (350-400 nm)	PAR (400-700 nm)	NIR (700-2500 nm)	Source longwave	Sky longwave	Emitted longwave	Total
Incident radiation (W/m^2)							
HPS	0.58	203	128	131	452	-435	480
LED	0.15	195	10	44	452	-435	267
Sun, greenhouse	18	219	252	0	452	-435	508
Sun, clear sky	19	219	288	0	300	-435	392
Fraction absorbed							
HPS	0.939	0.870	0.263	0.97	0.97	0.97	0.71
LED	0.934	0.943	0.923	0.97	0.97	0.97	0.90
Sun, greenhouse	0.938	0.894	0.214	0.97	0.97	0.97	0.53
Sun, clear sky	0.937	0.894	0.207	0.97	0.97	0.97	0.33
Total absorbed radiation (W/m^2)							
HPS	0.54	177	34	127	439	-422	342
LED	0.14	184	9	43	439	-422	240
Sun, greenhouse	17	196	54	0	439	-422	271
Sun, clear sky	18	196	60	0	291	-422	130

The indoor environments (LED, HPS, and greenhouse) had net positive longwave radiation, and the HPS fixture was significantly higher than the other sources. The effect of UV on absorbed radiation was less than 10% of absorbed PAR energy for all source.

Effect of environment on leaf to air temperature difference

The leaf-to-air temperature difference, in all radiation scenarios, was less than 2°C except where parameters approached their extremes (Fig. 4). The relative order did not change, regardless of environmental conditions, with HPS > greenhouse sun > LED > clear sky sunlight.

Near worst-case conditions (water stress, high PPF, and low wind; Fig. 5) increased the differences between lighting sources. The results indicate that leaf temperatures in near worst-case conditions can increase 6° to 12°C above air temperature depending on the radiation scenario.

Differences in radiation absorption

There were significant differences among sources in the ratio of NIR to PPF, but NIR wavelengths are poorly absorbed by leaves (Table 1), thus the effect of NIR on leaf temperature is relatively small. Blanchard and Runkle [12] found leaf temperature to be 0.7° to 1.5°C lower under NIR reflective painted glass as opposed to neutral reflective painted glass with similar PPF conditions (about 1100 $\mu\text{mole}/\text{m}^2\text{s}$), though much of this difference was likely due to differences in air temperature, which was on average

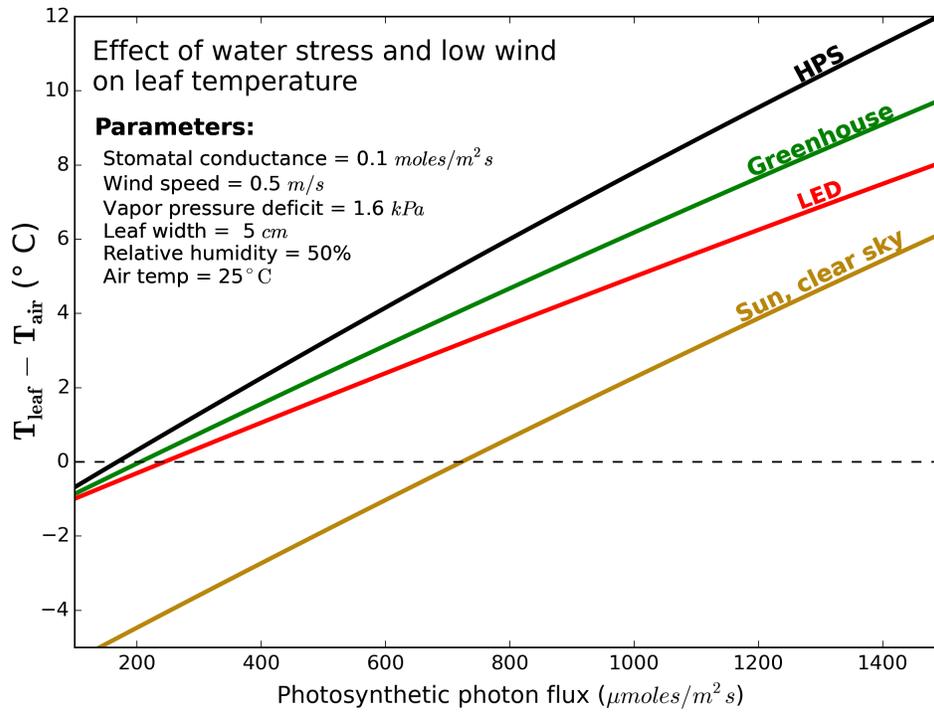


Figure 5. Calculated effects of PPF on the difference between leaf temperature and air temperature under four radiation scenarios in near worst-case conditions of water stress and low wind.

0.8°C higher under neutral reflective paint. This further shows that though NIR is a significant source of energy, its impact on individual leaves is small.

Longwave radiation varied significantly among radiation sources and had the biggest effect on leaf temperature. Because incoming longwave radiation from clear sky conditions is significantly less than that from the ceiling of controlled environments, plants grown outdoors have lower absorbed net radiation. Even on overcast days, incoming long wave radiation in the field is typically lower than in a controlled environment.

Our analysis includes two of the most efficient fixtures available. Increases or decreases in efficiency will likely cause small differences in source longwave radiation, but the effect of changes in fixture efficiency would be relatively small compared to the effect of differences between the two technologies.

Effect of light source on transpiration

Increased leaf temperature causes increased transpiration. When incoming radiation and radiation capture by the crop are the same, the transpiration rate of crops in protected environments are thus higher than the same crops the field.

In the field, however, water loss by evaporation from the soil surface can make the combination of evaporation and transpiration higher than the combination of evaporation and transpiration in a controlled environment. If the effect of surface evaporation is removed and transpiration from only the leaves is considered, crops in a

greenhouse would have a 35% higher transpiration rate than identical crops grown in the field. 206
207

Based on our presented model and the default parameters (Fig 4), the reduced leaf temperature under LED fixtures would decrease transpiration by 17% compared to HPS fixtures. This is a potentially significant reduction in transpiration, but differences in surface evaporation among cultural systems typically have a greater effect on crop water requirement than lamp type. For example, drip irrigation can decrease evaporation from surfaces and reduce the crop water requirement by 30 to 70%, in both greenhouses and in the field [13]. 208
209
210
211
212
213
214

Effect of elevated CO₂ 215

Controlled environments often add supplemental CO₂, which can decrease stomatal conductance 10-40% [14, 15], and increase leaf temperature. The presented model indicates that a decrease in stomatal conductance of 30% in response to elevated CO₂ would increase leaf temperature by 1°C in all radiation scenarios. 216
217
218
219

Effect of light source on shoot tip temperature 220

Shoot tip temperature is often used to predict time to flower and plant development rates [16]. Our modeling approach is similar to that used by Shimizu et al. [4] and Faust and Heins [17] to predict shoot tip temperature, both of which found greater than 83% of their modeled values to be within 1°C of measured values. Because our models are similar, choice of lighting technology will likely affect shoot tip temperature, time to flower and plant development. 221
222
223
224
225
226

Effect of light source on fruit and flower temperature 227

Our near-worst case analysis would likely be representative of flowers, fruits, and thick, dense plant parts that have low transpiration rates, including high value products such as tomatoes, strawberries, and *Cannabis* flowers. These thicker structures would absorb more radiation than a thin leaf. Our measurements show that while only 63% of HPS shortwave radiation is absorbed by the first leaf, a structure ten times thicker would absorb more than 80%. LED technology has the potential to reduce heating of these thick, low transpiring plant structures. 228
229
230
231
232
233
234

Conclusions 235


The presented model indicates that the use of LED technology reduces leaf temperature by about 1.3°C compared to HPS technology under typical, indoor growing conditions, but a leaf in a controlled environment will be warmer than a leaf in the field under a clear sky, assuming equal PPF and similar environmental conditions. In conditions where leaves benefit from heating, such as a greenhouse in a cool climate, HPS technology more effectively transfers heat to canopies. 236
237
238
239
240
241

Supporting Information

242

S1

243

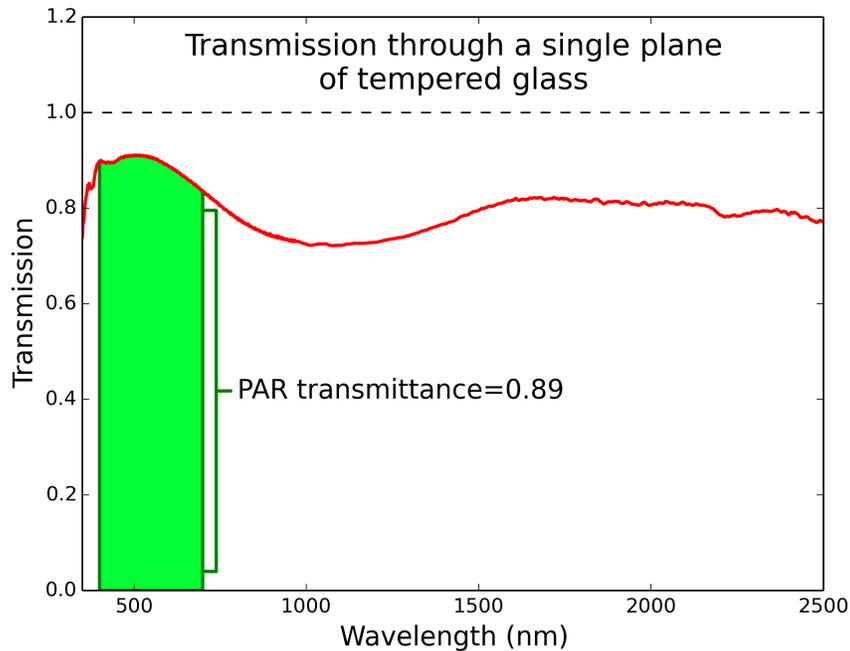

Transmission of radiation through a single pane of tempered glass. PAR was 89% transmitted.

244

245

246

S2

247

Overview of code used to run the associated model.

248

Acknowledgments

249

We thank Peter Nelson, Sandra Rhoades, and Alec Hay for their dedicated technical work.

250

251

252

References

253

- Baille M, Baille A, Delmon D (1994) Microclimate and transpiration of greenhouse rose crops. *Agricultural and Forest Meteorology* 71: 83–97. (document)
- Kichah A, Bournet PE, Migeon C, Boulard T (2012) Measurement and CFD simulation of microclimate characteristics and transpiration of an Impatiens pot plant crop in a greenhouse. *Biosystems Engineering* 112: 22–34. (document)

254

255

256

257

258

259

3. Seginer I (1984) On the night transpiration of greenhouse roses under glass or plastic cover. *Agricultural Meteorology* 30: 257–268. (document) 260 261
4. Shimizu H, Runkle ES, Heins RD (2004) A steady-state model for prediction of poinsettia plant shoot-tip temperature. *Journal of the American Society for Horticultural Science* 129: 303–312. (document) 262 263 264
5. Blonquist J, Norman J, Bugbee B (2009) Automated measurement of canopy stomatal conductance based on infrared temperature. *Agricultural and Forest Meteorology* 149: 2183–2197. (document) 265 266 267
6. Widmoser P (2009) A discussion on and alternative to the Penman–Monteith equation. *Agricultural Water Management* 96: 711–721. (document) 268 269
7. Nelson JA, Bugbee B (2014) Economic analysis of greenhouse lighting: light emitting diodes vs. high intensity discharge fixtures. *PLoS ONE* 9: e99010. (document) 270 271 272
8. Jones HG (2013) *Plants and microclimate: a quantitative approach to environmental plant physiology*. Cambridge University Press. (document) 273 274
9. McCree K (1972) The action spectrum, absorptance and quantum yield of photosynthesis in crop plants. *Agricultural Meteorology* 9: 191–216. (document) 275 276
10. Campbell GS, Norman JM (1998) *An introduction to environmental biophysics*. Springer. (document) 277 278
11. Monteith JL, Unsworth MH (1990) *Principles of environmental physics*. Edward Arnold, second edition. (document) 279 280
12. Blanchard MG, Runkle ES (2010) Influence of NIR-reflecting shading paint on greenhouse environment, plant temperature, and growth and flowering of bedding plants. *Transactions of the ASABE* 53: 939–944. (document) 281 282 283
13. Camp CR (1998) Subsurface drip irrigation: a review. *Transactions of the ASAE* 41: 1353–1367. (document) 284 285
14. Ainsworth EA, Rogers A (2007) The response of photosynthesis and stomatal conductance to rising CO₂: mechanisms and environmental interactions: Photosynthesis and stomatal conductance responses to rising CO₂. *Plant, Cell & Environment* 30: 258–270. (document) 286 287 288 289
15. Wheeler RM, Mackowiak CL, Yorio NC, Sager JC (1999) Effects of CO₂ on stomatal conductance: do stomata open at very high CO₂ concentrations? *Annals of botany* 83: 243–251. (document) 290 291 292
16. Faust JE, Heins RD (1993) Modeling leaf development of the African violet (*Saintpaulia ionantha* Wendl.). *Journal of the American Society for Horticultural Science* 118: 747–751. (document) 293 294 295
17. Faust JE, Heins RD (1998) Modeling shoot-tip temperature in the greenhouse environment. *Journal of the American Society for Horticultural Science* 123: 208–214. (document) 296 297 298